


The Art of Music Reproduction

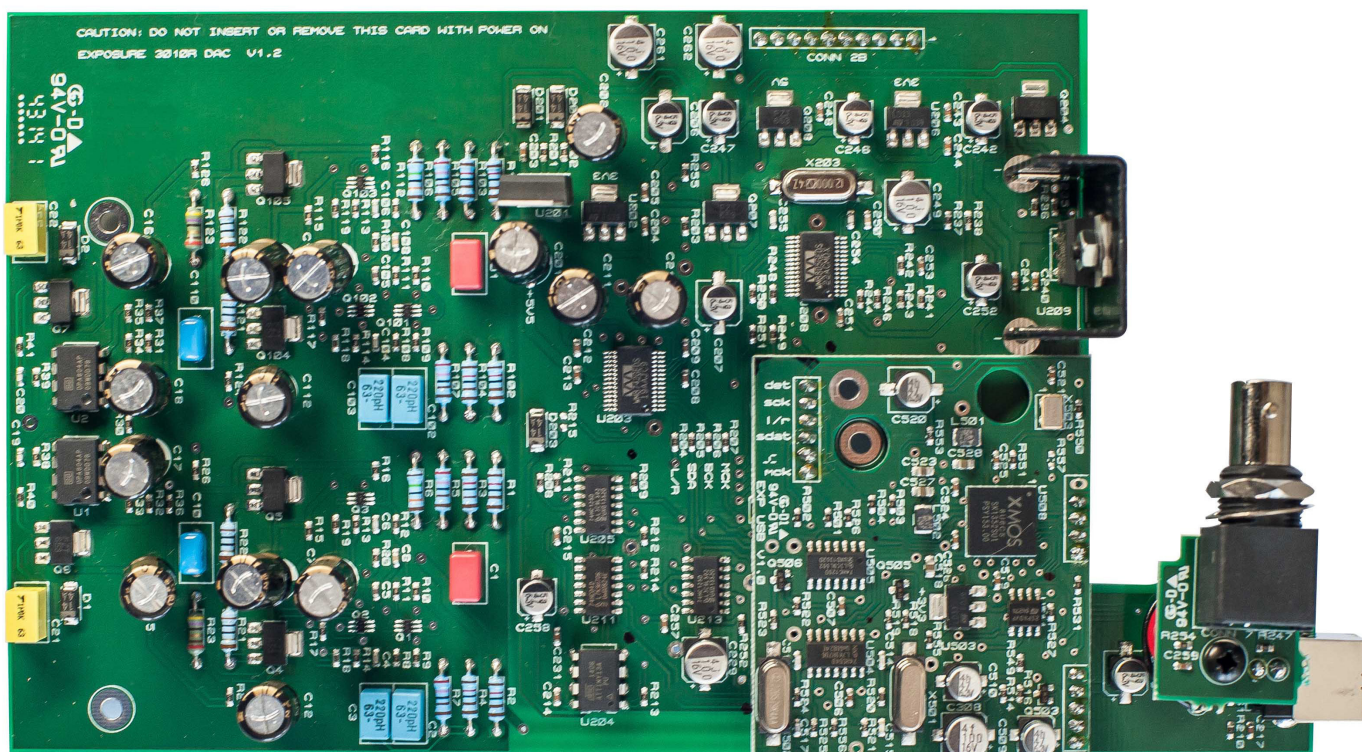

3510 & 5010 DAC Plug-In Board

Specifications

2V RMS output for full scale input

THD @ 1kHz < 0.005%

One Coax (BNC) input sample rate supported :

32, 44.1, 48, 88.2, 96, 176.4 & 192kHz @ up to 24 bits

USB2 input sample rate supported :

44.1, 48, 88.2, 96, 176.4 & 192kHz PCM @ up to 24 bits

DSD x64 (DoP)

Features

- All discrete transistor output stage
- High quality parts used throughout
- Tight tolerance parts used for analogue filtering
- Low noise audio stage power supply regulators

Can be fitted to :

- 3010S2D Integrated Amplifier
- 3010S2D Pre-Amplifier
- 3510 Integrated Amplifier
- 3510 Pre-Amplifier
- 5010 Pre-Amplifier